

SMART CLEAN ROOM PHONE (MODEL CR-IIIAD)


SMART CLEAN ROOM PHONE (MODEL CR-IIIAD) is a vandal resistant, flush mount type FULL FEATURED CLEAN ROOM PHONE

These units are True handsfree operation with Auto activation and Deactivation facility

The front dial is Polyester 150

Cabinet is powder coated

These units come with one AUTO DIAL button and 4 X3 matrix standard keypad

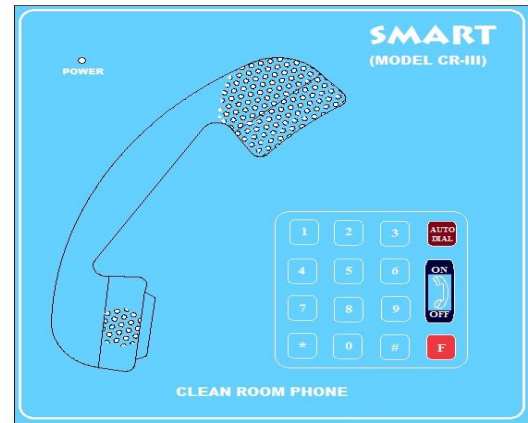

OPERATIONS:

TO MAKE A CALL: -

- Press the on button, on hearing the dial tone dial the extn no of operator.
- When the call is answered, communicate using the mic & speaker.

INCOMING CALL: -

- From any phone dial the extension number of SMART CLEAN ROOM PHONE.
- The unit will activate and message will be heard over its speaker.
- Communicate handsfree using the mic & speaker.
- The unit will reset on busy tone

VERSATILE APPLICATIONS

✱ Drugs and Pharma Units ✱ Biomedical Plants ✱ Pharmaceutical Plants ✱ Cement Plants. ✱ Mines. ✱ Petrochemical Refineries. ✱ Chemical Plants. ✱ Spinning Yarns ✱ Fertilizer Plants. ✱ Sugar Mills. ✱ Power Generation Facilities ✱ Pulp & Paper Mills ✱ Food Processing Plant ✱ Warehouses ✱ Recreation Facilities ✱ Hydroelectric Facilities ✱ Drilling Rigs ✱ Ammonia Storage Area ✱ Process industries ✱ ANY LARGE AND MEDIUM SCALE INDUSTRIAL UNITS.

SMART CHOICE: -

- Operating on 220/110 V AC
- Simple Installation
- Simple Operation
- Auto Activation, deactivation
- Amplifier with volume control for internal speaker.
- 18 gauge rugged steel powder coated body
- Polyester F150 front DIAL
- Encapsulated circuit boards impervious to water and condensation.
- Single PCB design for plug n play operation.

SPECIFICATIONS: -

Electrical performance:-

Ringer sensitivity	40 – 100 V AC@ 16 – 25 Hz.
Dialing method	DTMF .
Ringer output	70 dB at 1 Mtr.
Speaker output	50 dB at 1 Mtr
Set impedance	600 OHMS nominal.
Inbuilt Amplifier	3 Watts (RMS)

Electrical requirements:-

Line voltage	24 -56 V DC.
Loop current	20 - 120 mA.
Fuse	0.25 Amp 2AG fast blow.

Environmental:-

Temperature	0 to +60 C.
Humidity	0 to 95% Rh non-condensing.
Enclosure	Dust proof.

Mechanical

Body construction	18 SWG steel, powder coated body with FRONT AL DIAL plate.
Dimensions	230 x 230 x 60 mm.
Net weight	1.8 kgs.
Standard mounting	FLUSH/Wall mount.
Hardware material	Stainless steel.

INDUSTRIAL COMMUNICATIONS SIMPLIFIED .

Cables & Wireless Co.
FF 75 RAJAT ARCADE, MIDC T-POINT,
AMRAWATI ROAD, WADI,
NAGPUR -440023.MAHARASHTRA ,INDIA.
PHONE:-+917104-321913, +917104-224381
FAX:- +917104-224381.
Cell: - +9198226 95746, +919822941190.
Website:- www.cnwcom.in.
E-mail: - cnwcom@gmail.com

“(Specifications and description subjected to change without prior notice)”